


## Schlauchverschraubung mit Hülsenverschraubung

### Messing

PN 16

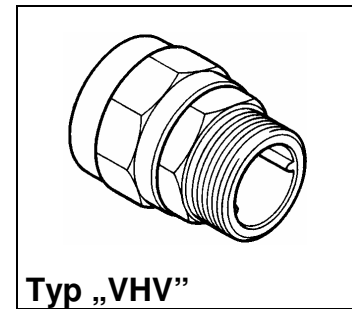

- Norm (Gewinde) : G = DIN ISO 228/BSP, R = DIN 2999, NPT = ANSI/ASME B1.20.1-83  
 Material (Standard) : Ms

Bestell-Nr.	Typ/DN	NW		Dichtform Gewinde	Material Kupplung	Gewicht ca - kg -	Preis - €/Stück -
		Schlauch - mm -	Gewinde				
a1vhv135r13m	VHV13	13x5	R 1/2"	Gew./fld.	Ms	0,12	
a1vhv155r19m	VHV15	15x5	R 3/4"	Gew./fld.	Ms	0,17	
a1vhv155n19m			3/4" NPT	Gew.		0,17	
a1vhv194r19m	VHV19	19x4	R 3/4"	Gew./fld.	Ms	0,17	
a1vhv194n19m			3/4" NPT	Gew.		0,17	
a1vhv194g25m			G 1"	fld.		0,19	
a1vhv195r19m	VHV19	19x5	R 3/4"	Gew./fld.	Ms	0,18	
a1vhv195n19m			3/4" NPT	Gew.		0,18	
a1vhv195g25m			G 1"	fld.		0,20	
a1vhv196r19m	VHV19	19x6	R 3/4"	Gew./fld.	Ms	0,19	
a1vhv196n19m			3/4" NPT	Gew.		0,19	
a1vhv196g25m			G 1"	fld.		0,21	
a1vhv255g25m	VHV25	25x5	G 1"	fld.	Ms	0,25	
a1vhv255n25m			1" NPT	Gew.		0,19	
a1vhv256g25m	VHV25	25x6	G 1"	fld.	Ms	0,28	
a1vhv256n25m			1" NPT	Gew.		0,30	
a1vhv326g32m	VHV32	32x6	G 1 1/4"	fld.	Ms	0,44	
a1vhv386g38m	VHV38	38x6,5	G 1 1/2"	fld.	Ms	0,56	